


CSEVC-BF-XXKW-1E(7-22KW)

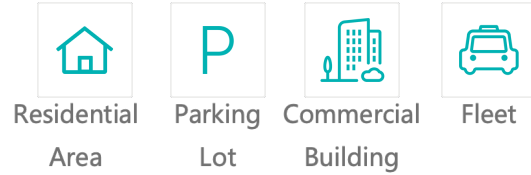

4.3 Inch LCD Display(Screen version)

LCD screen can display the real-time charging status, including time, voltage, current, power and so on.

All-round protection

Include voltage protection, current protection, leakage protection, temperature protection, lightning protection and other protective measures to ensure the safety.

IP55, Strong and Durable

Support outdoor harsh environment, waterproof and dustproof. Rugged shell which could resist the rolling and crash of the car.

High intelligence

Powerful information collection, transmission and communication functions, supporting Bluetooth, Ethernet, 4G and WIFI wireless communication.

Easy to install and use

Support outdoor harsh environment, waterproof and dustproof. Rugged The installation process is simple, payment is convenient and fast, supports mobile application software or IC card swiping. Fully compatible with all EV in the market.



Power	7kw/11kw/22kw
Number of rechargeable guns	single gun
Gun line length	standard configuration 5m
Display method	4.3 Inch LCD Display
Startup method	APP/swiping card/Plug-and-charge
Networking method	4G/WIFI/Ethernet/Bluetooth
Network platform	WS/WSS OCPP1.6J (ocpp2.0 optional)
Input voltage	AC220V±10% AC400±%10
Output current	16A/32A
Input frequency	48Hz-65Hz
Protection function	Short circuit, overload, over temperature, leakage, overvoltage, etc.
Extended function	DLB,PEN,AC PLC(ISO15118-2/ISO15118-20(developing)), support PNC/V2G/V2H(developing)
Product Dimension	205*355*115mm (H*W*D)
Package Dimension	500*350*250mm (H*W*D)
Net Weight	<5kg
Gross Weight	<6kg
Protection level	IP55
Operating temperature	-20°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Relative humidity	5°C ~ +95°C
Altitude	≤2000m
Installation method	Wall/Column